

FIAMM

Industrial Batteries

HIGHLITE FLX series



FIAMM's FLX batteries have been specifically designed to achieve optimal performance in:

- + High-Rate UPS Systems
- + Emergency Power Applications

A compact footprint provides easy installation in cabinets and racks with minimal space clearance.

Capable of protecting the critical load from power disturbances. Our FLX range offers an excellent solution for today's power requirements:

- + Safe
- + Versatile
- + Reliable
- + Long Life
- + Superior Energy Density
- + Easy Handling and Installation

Technical Features

Plates and Grids: gravity casted grids from high purity lead calcium tin alloy to provide an optimal current conducting framework for high rate discharges.

Separators: microporous absorbent glass mat facilitates recombination and immobilizes the electrolyte.

Terminals: threaded female alloy terminal posts provide high conductivity, maximum torque retention and easy installation.

Post Seals: state of the art post seals prevent acid seepage over a wide temperature range .

Safety Valve: each cell has its own one way valve that opens at 5 psi and closes at 3 psi to allow excess gas to escape in case of over-charging.

Container and Cover: made from thick walled ABS plastic and designed for unsurpassed mechanical strength, the cases and covers have an LOI greater than 28% and meet the flame retardant standards of UL94 V-0.

Flame Arrestor Device: releases excess gas while preventing any errant spark or flame from entering the battery.

Applicable Standards

Telcordia (Bellcore) SR-4228
Telcordia (Bellcore) TR-NWT-001200
Telcordia (Bellcore) TR-NWT-000909
UL Recognized
UL 94 Class V-0
UL 1778
IEC 60896 Part 21-22

Product Features

- + AGM Technology (high recombination efficiency, up to 99%)
- + 10 year design life @ 25°C
- + No Electrolyte Maintenance Required
- + Operating in any orientation. We recommend upright, side or end mounting
- + No restriction in air/surface/water transportation

Standby Products

HIGHLITE FLX series

FIAMM FLX range



BATTERY TYPE	NOMINAL VOLTAGE (V)	CAPACITY (AH) Ah at 20°C	DIMENSIONS in.			WEIGHT lbs/(kg)	TERMINALS
		20 hrs to 1.75 VPC	Top Length/ Bottom Length	Top Width/ Bottom Width	Top Height/ Bottom Height		
12 FLX 200	12	55	9.01/8.90	5.43/5.34	8.35	40.8/(18.5)	1/4" - 20
12 FLX 250	12	70	10.69/10.61	6.54/3.65	7.68	51.8/(23.5)	1/4" - 20
12 FLX 300	12	75	10.27/10.16	6.85/6.57	8.58	59.5/(27.0)	1/4" - 20
12 FLX 350	12	90	11.87/11.76	6.85/6.57	8.58	68.3/(31.0)	1/4" - 20
12 FLX 400	12	100	13.31/12.74	6.85/6.57	8.46	76.1/(34.5)	1/4" - 20
12 FLX 500	12	135	13.31/12.74	6.85/6.57	10.87	102.5/(46.5)	1/4" - 20
12 FLX 540	12	150	13.31/12.74	6.85/6.57	10.87	112.5/(51.0)	1/4" - 20

DISCHARGE WATTS PER CELL TO 1.67 V/CELL AT 25°C

BATTERY TYPE	MINUTES						
	5	10	15	20	30	45	60
12 FLX 200	354	256	204	167	125	91.9	73.4
12 FLX 250	489	339	257	207	152	108	86.8
12 FLX 300	526	394	311	254	187	135	106
12 FLX 350	632	472	374	305	225	162	128
12 FLX 400	702	525	415	339	250	180	142
12 FLX 500	746	569	493	378	280	203	162
12 FLX 540	869	657	540	448	343	252	196

Electrical Characteristics

- +
 - +
 - +
- FLOAT VOLTAGE CHARGE AT 77°F: 13.62 V/bloc
 FLOAT VOLTAGE COMPENSATION WITH TEMPERATURE: -8.3 mV/°F per bloc
 SELF-DISCHARGE AT 77°F: < 2% / month

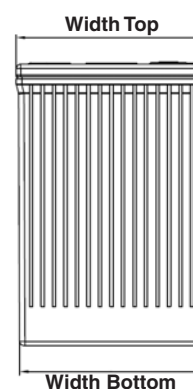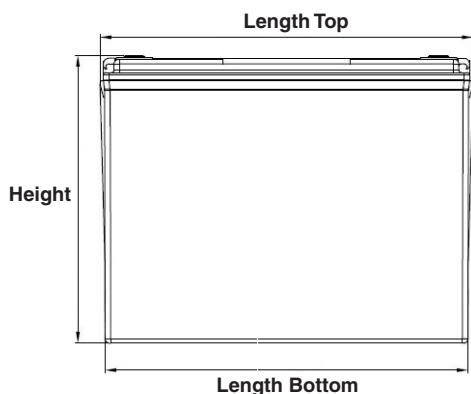

FIAMM Energy LLC, One FIAMM Way, Waynesboro, GA 30830 Tel. 888-77-FIAMM (888-773-4266)
 FIAMM Technologies LLC reserves the right to change or revise without notice any information or detail given in this publication

FIAMM Energy LLC
 1 FIAMM Way
 Waynesboro, GA 30830
 www.fiamm.com
 email: info.standby.america@fiamm.com



Industrial Batteries